

Emission: Internal Quantum Efficiency

In this tutorial we demonstrate how to calculate the internal quantum efficiency of a multi-quantum well structure as a function of the applied forward bias.

Physics Model

nextnano++ is capable of simulating recombination processes such as *Shockley-Read-Hall (SRH)*, *Auger* and *radiative* recombination. Only the radiative (*direct*) recombination process (spontaneous emission) generates photons. If radiative recombination $R_{\text{sp}}(x)$ is summed up over the full device, it equals the total number of photons emitted from the device per second, the photocurrent: I_{photon} .

$$R_{\text{sp}} = c_r (n_p - n_i^2)$$

$$I_{\text{photon}} = \int_{V_0} R_{\text{sp}} \, dV$$

If the injected charge carrier current is I_{charge} , then the internal quantum efficiency η_{qe} is

$$\eta_{\text{qe}} = \frac{I_{\text{photon}}}{I_{\text{charge}}}$$

Input file structure

Drift Diffusion

```
recombination_model{
    SRH          = yes      # Shockley-Read-Hall recombination
    Auger        = yes      # Auger recombination
    radiative     = yes      # radiative recombination (direct
recombination)
}
```

The internal quantum efficiency is calculated automatically when the radiative recombination is switched on

```
radiative      = yes      # radiative recombination (direct
recombination)
```

Results

Bandstructure

The band structure of the **MQW** structure can be seen in figure 1 without bias voltage.

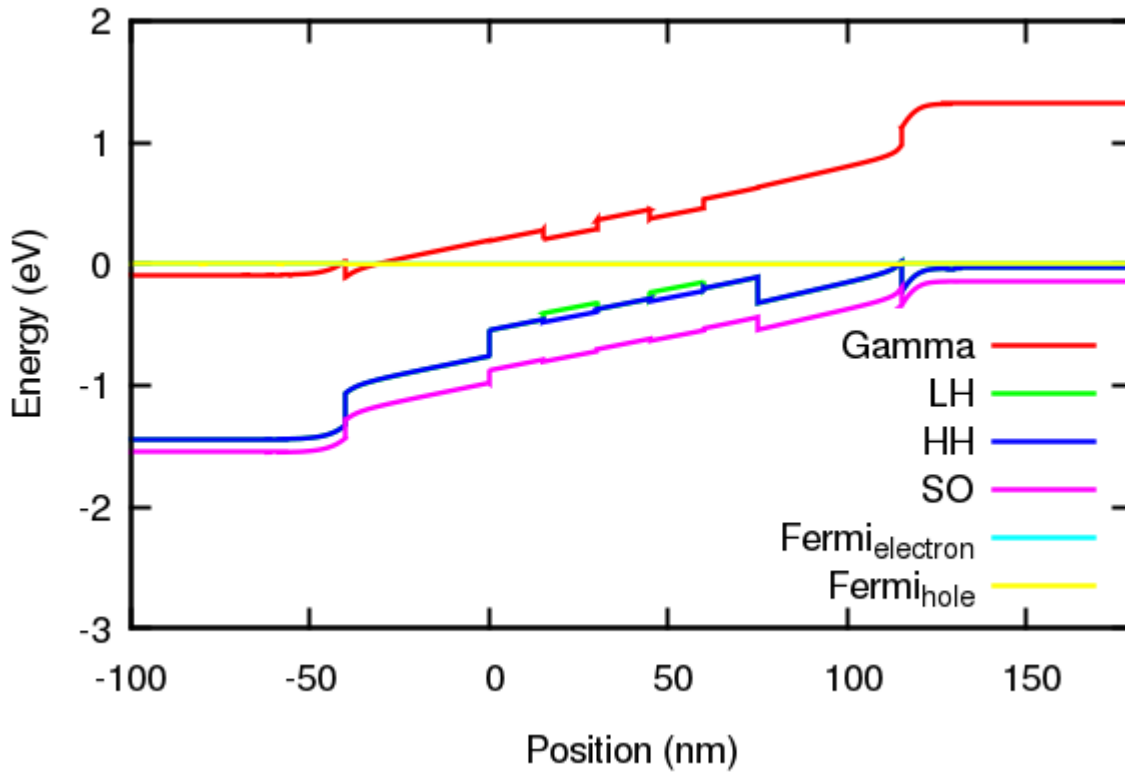


Figure 1: Band structure at zero bias. The two quantum wells consist of $\text{In}_{0.7}\text{Ga}_{0.3}\text{As}$ and are surrounded by $\text{In}_{0.53}\text{Ga}_{0.47}\text{As}$ barriers.

Recombination

An example for the distribution of the recombination processes is plotted in figure 2

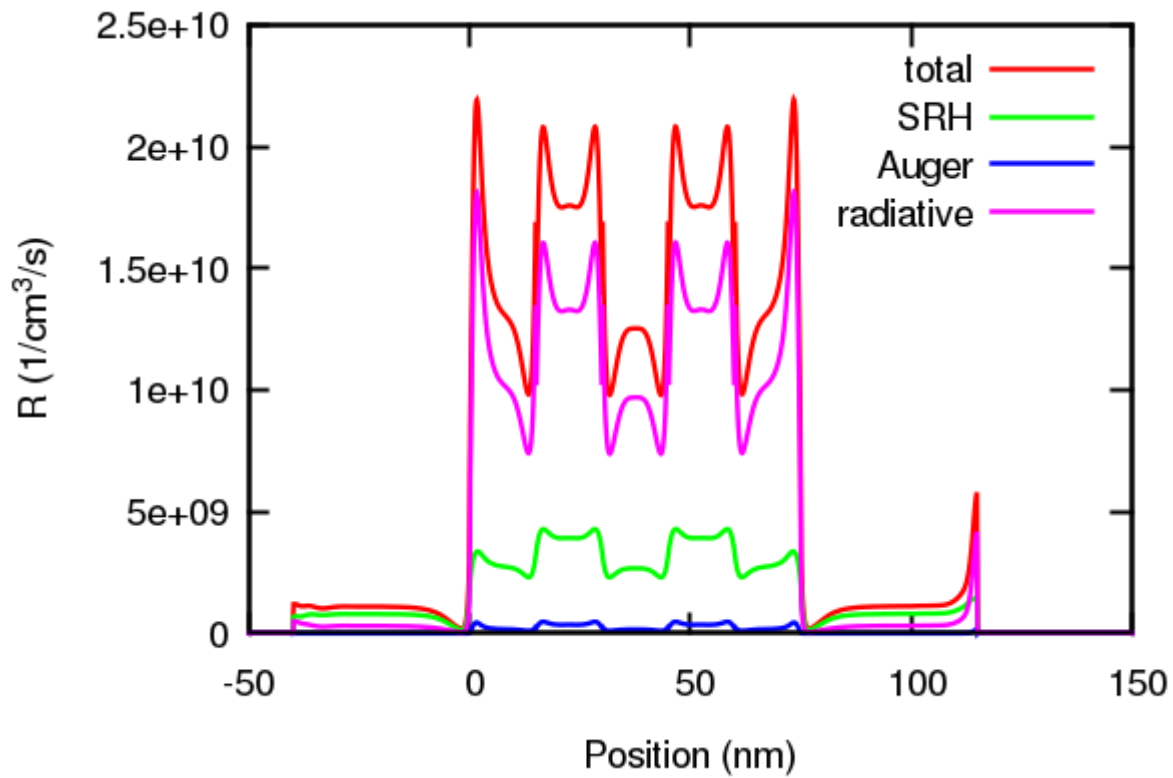


Figure 2: Comparison of different recombination processes

Current-Voltage Characteristics

The I - V characteristics of the device is plotted in figure 3. This figure also includes the full photo current.

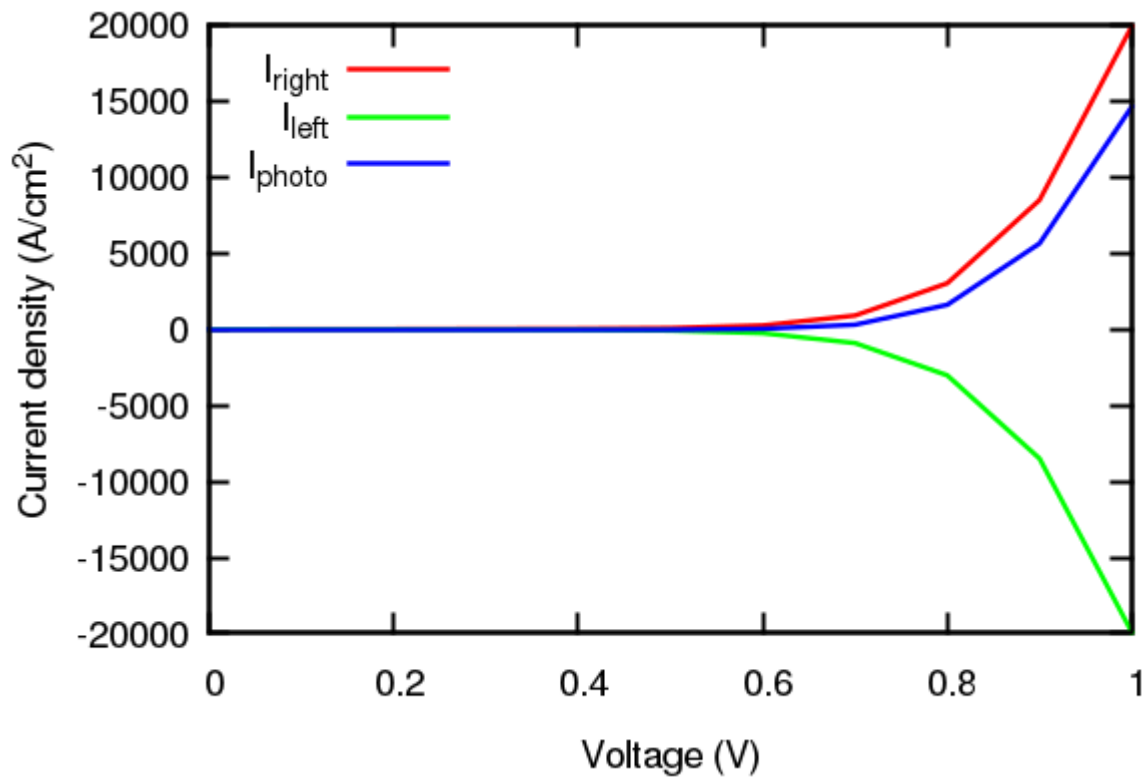


Figure 3: I - V characteristics of the device and photo current. The device has two contacts and the charge carrier current densities at the left and at the right contact are equal in absolute value.

Quantum Efficiency

The internal quantum efficiency is plotted in figure 4

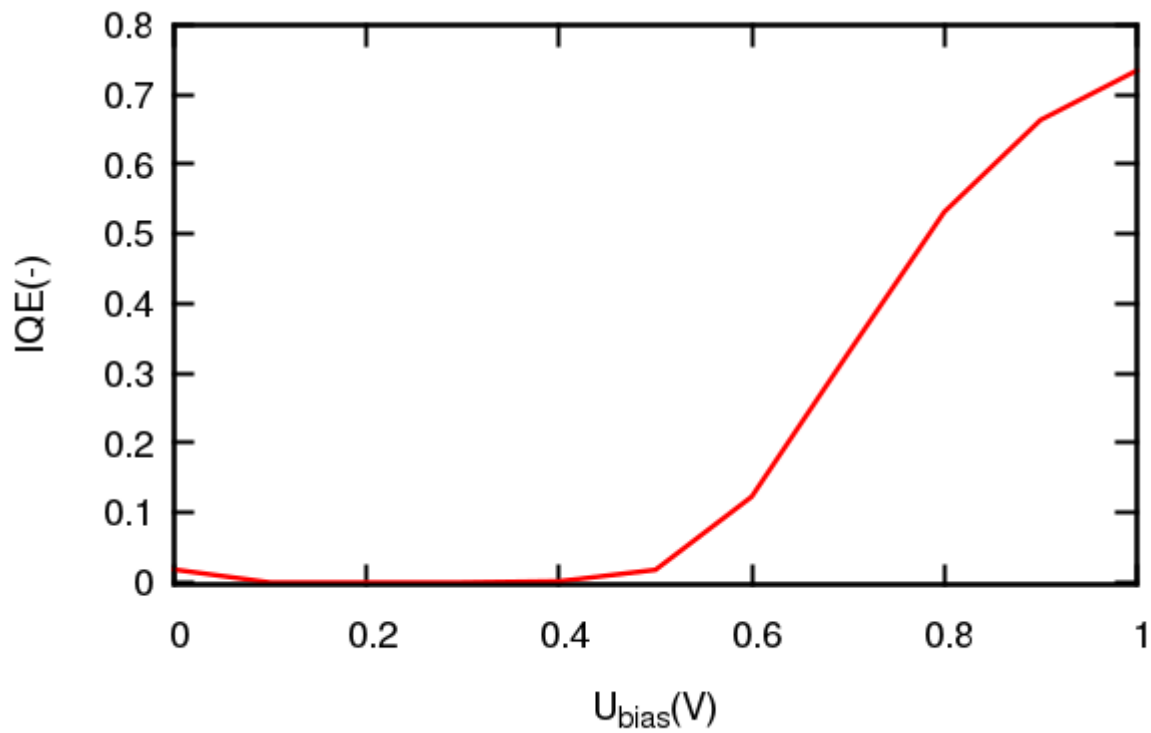


Figure 4: Internal quantum efficiency in the function of the forward bias voltage

From:

<https://nextnano-docu.northeurope.cloudapp.azure.com/dokuwiki/> - nextnano.NEGF - Software for Quantum Transport

Permanent link:

https://nextnano-docu.northeurope.cloudapp.azure.com/dokuwiki/doku.php?id=nnp:optics:internal_quantum_efficiency&rev=1486116894

Last update: 2017/02/03 10:14